


QualityForks for upside-down suspension (upside-down fork)

Company _____	Name _____
Street _____	Tel. _____ Fax _____
Postal code, town _____	E-Mail _____
Cross-section (width x thickness) _____	Lift truck brand _____
Length (L) _____	Lift truck type _____
Quantity _____	Attachment _____
Delivery date _____	Application _____

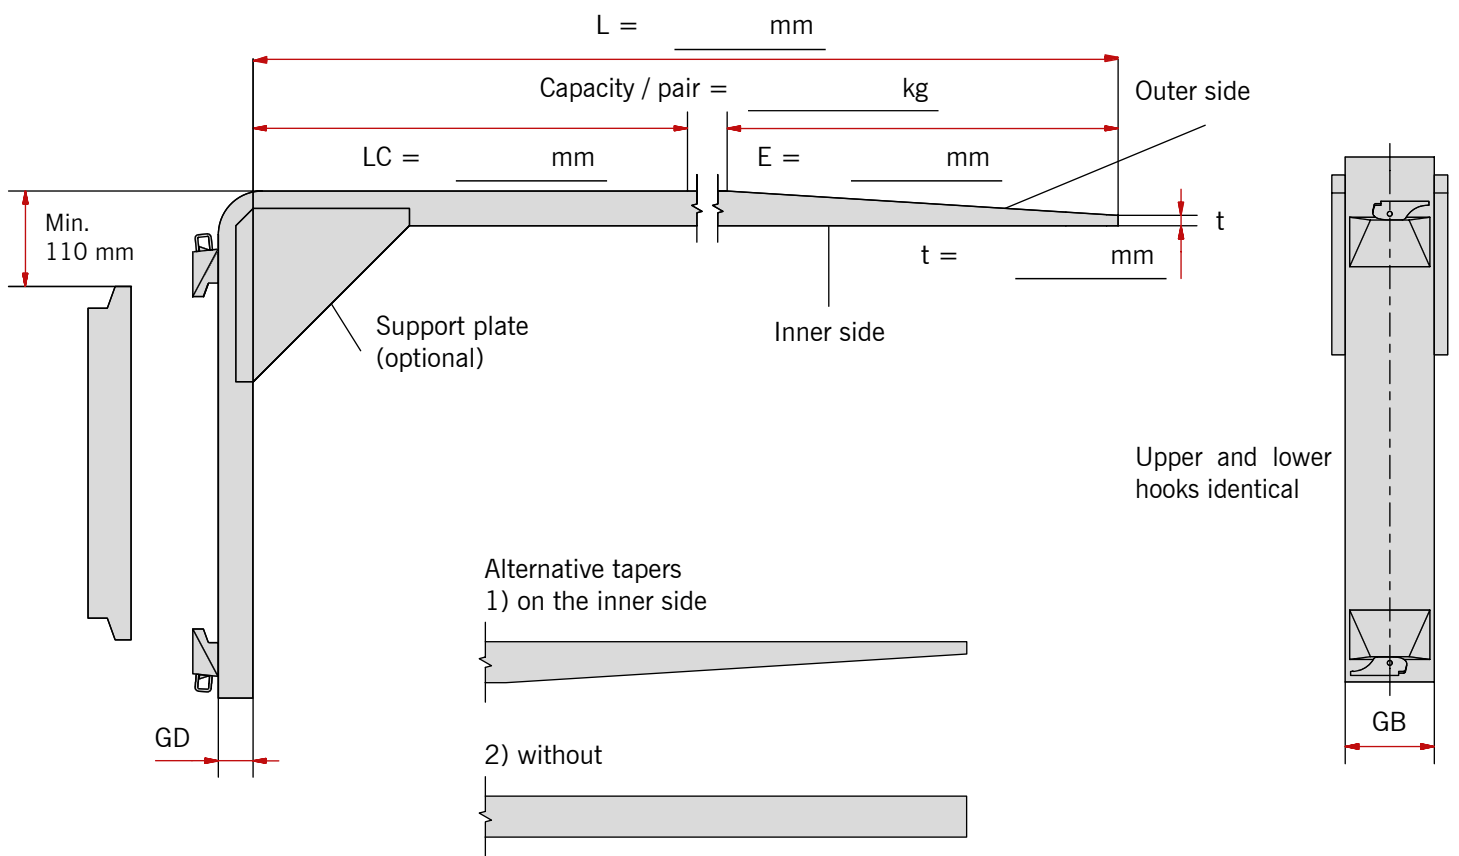

Suspension
Please tick

- | | | | | |
|--------|--------|--------|--------|--------|
| ISO 1A | ISO 2A | ISO 3A | ISO 4A | ISO 5A |
| ISO 1B | ISO 2B | ISO 3B | ISO 4B | ISO 5B |
- Special suspension (please attach drawing / inquiry form)
 Fork will only be used as upside-down fork
 Fork will be used as upside-down fork as well as „normal“ fork

Taper
Please tick

- at the outer side
 at the inner side
 without taper

Support plate

- is possible
 is not possible