



# ManuTel<sup>®</sup>

## Efficient and safe

### Your benefits



Truck loading and unloading  
from one side



Transport of 2 or 3 pallets  
at once



Time and cost savings

### Manual telescopic forks

- Easy application without tools or hydraulics
- Robust design, also for all-terrain use
- Legal conformity according to EC machinery directive
- Intermediate locks on request



### From the field



Easy length adjustment  
with bolts



Transport of several pallets at  
the same time



Truck loading and unloading from  
one side




# ManuTel<sup>®</sup>

## Technical information

### Load capacity at load center

ManuTel<sup>®</sup> G2 Standard edition

MTGZ-16		MTGZ-25		MTGZ-35		MTGZ-50		MTGZ-50-6	
Load center (mm)	Capacity (kg/pair)	Load center (mm)	Capacity (kg/pair)	Load center (mm)	Capacity (kg/pair)	Load center (mm)	Capacity (kg/pair)	Load center (mm)	Capacity (kg/pair)
500	1600	500	2500	500	3500	500	5000	500	5952
600	1340	600	2097	600	2938	600	4200	600	5000
700	1152	700	1806	700	2531	700	3621	700	4310
800	1011	800	1585	800	2223	800	3182	800	3788
900	901	900	1413	900	1982	900	2838	900	3378
1000	812	1000	1275	1000	1789	1000	2561	1000	3049
1100	739	1100	1161	1100	1629	1100	2333	1100	2778
1200	667	1200	1066	1200	1496	1200	2143	1200	2551
1300	603	1300	985	1300	1355	1300	1981	1300	2358
1400	550	1400	915	1400	1236	1400	1842	1400	2193
1500	505	1500	850	1500	1136	1500	1721	1500	2049
1600	468	1600	787	1600	1051	1600	1615	1600	1923
1700	435	1700	732	1700	978	1700	1522	1700	1812
1800	407	1800	685	1800	915	1800	1428	1800	1712
1900	382	1900	643	1900	859	1900	1341	1900	1623
2000	360	2000	606	2000	810	2000	1264	2000	1543
		2100	573	2100	766	2100	1195	2100	1471
		2200	543	2200	726	2200	1134	2200	1404
		2300	517	2300	691	2300	1078	2300	1344
		2400	493	2400	658	2400	1028	2400	1289

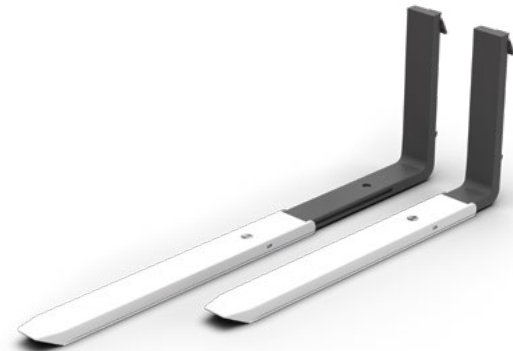

ManuTel<sup>®</sup> G2 Standard edition

- Wear-resistant straight manganese steel plate on the lower side of the fork shoe
- Standard capacity up to 5 tons at load centre 600 mm, custom-made capacities on demand
- Ideal for loading and unloading trucks from one side

### Load capacity at load center

ManuTel<sup>®</sup> G2 SlimLine edition

MTSK 18/12/20		MTSK 20/12/18	
Load center (mm)	Capacity (kg/pair)	Load center (mm)	Capacity (kg/pair)
500	1800	500	2000
600	1520	600	1670
700	1310	700	1400
800	1150	800	1200
900	1050	900	1050
1000	950	1000	950
1100	880	1100	880
1200	800	1200	800
1300	720	1300	720
1400	680	1400	680
1500	620	1500	620
1600	590	1600	590
1700	550	1700	550
1800	500	1800	500
1900	480	1900	-
2000	460	2000	-



ManuTel<sup>®</sup> G2 SlimLine edition

- Extra-thin blade: only 40 mm thick
- Quick release pin-locking device for easy length adjustment
- Capacity up to 2 tons
- Ideal for loads and pallets with small apertures